



**AIA**<sup>®</sup>

# Document A310™ – 1970

## Bid Bond

KNOW ALL MEN BY THESE PRESENTS, that we **HK&S Construction Holding, Corp. of PO Box 6,**  
*(Here insert full name and address or legal title of Contractor)*  
**Newport, RI 02840**

as Principal, hereinafter called the Principal, and **Endurance American Insurance Company of 333**  
*(Here insert full name and address or legal title of Surety)*  
**Westchester Avenue, White Plains, NY 10604**

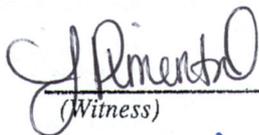
a corporation duly organized under the laws of the State of **Delaware**  
as Surety, hereinafter called the Surety, are held and firmly bound unto **State of Rhode Island of One Capitol Hill,**  
*(Here insert full name and address or legal title of Owner)*  
**Providence, RI 02908**

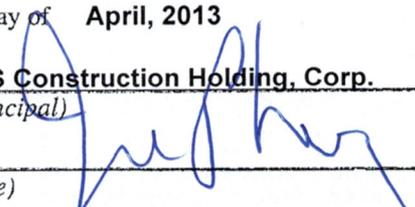
as Obligee, hereinafter called the Obligee, in the sum of **FIVE PERCENT OF AMOUNT BID**  
Dollars (\$ **5% OF BID** ), for the payment  
of which sum well and truly to be made, the said Principal and the said Surety, bind ourselves, our heirs, executors,  
administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for **Site Improvements - URI 7461378**  
*(Here insert full name, address and description of project)*

NOW, THEREFORE, if the Obligee shall accept the bid of the Principal and the Principal shall enter into a Contract  
with the Obligee in accordance with the terms of such bid, and give such bond or bonds as may be specified in the  
bidding or Contract Documents with good and sufficient surety for the faithful performance of such Contract and for the  
prompt payment of labor and material furnished in the prosecution thereof, or in the event of the failure of the Principal  
to enter such Contract and give such bond or bonds, if the Principal shall pay to the Obligee the difference not to exceed  
the penalty hereof between the amount specified in said bid and such larger amount for which the Obligee may in good  
faith contract with another party to perform the Work covered by said bid, then this obligation shall be null and void,  
otherwise to remain in full force and effect.

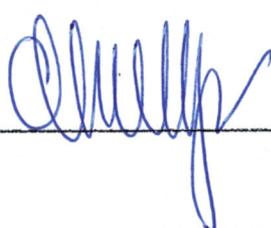
Signed and sealed this **29th** day of **April, 2013**

  
*(Witness)*

**HK&S Construction Holding, Corp.**  
*(Principal)*  *(Seal)*

*(Title)*

**Endurance American Insurance Company**  
*(Surety)*

  
*(Witness)*

*(Title)*

  
**Mark D. Leskani**  
**Attorney-in-Fact** *(Seal)*

State of Rhode Island and Providence Plantations Contract Offer  
**RIVIP BIDDER CERTIFICATION COVER FORM**

**SECTION 1 - VENDOR INFORMATION**

**Bid/RFPNumber:** 7461378A3  
**Bid/RFP Title:** SITE IMPROVEMENTS - URI - ADDENDUM 3 (12 PGS)

**Opening Date & Time:** 5/10/2013 11:00 AM

**RIVIP Vendor ID #:** 34587

**Vendor Name:** HK&S CONSTRUCTION HOLDING CORP.  
**Address:** 51 America's Cup Avenue  
Newport , RI 02840  
USA

**Telephone:** (401) 847-7350  
**Fax:** (401) 847-7351  
**E-Mail:** HugoKeyandSon@Verizon.net  
**Contact Person:** JONATHAN KEY  
**Title:** PRESIDENT  
**R.I. Foreign Corp #:**

**REVISED NOTICE TO VENDORS**

**Effective January 1, 2013 all public works project related bids or proposals exceeding FIVE HUNDRED THOUSAND (\$500,000) DOLLARS are required to include a "public copy". All agency contract solicitations, invitations for bids, etc. shall state that any bid or proposal that exceeds FIVE HUNDRED THOUSAND (\$500,000) DOLLARS must include a copy to be available for public inspection upon the opening of the bids. Any bid or proposal in excess of FIVE HUNDRED THOUSAND (\$500,000) DOLLARS which does not include a copy for public inspection shall be deemed to be non-responsive. Additionally, proposals submitted for a Master Price Agreement, when the total amount potentially may exceed FIVE HUNDRED THOUSAND (\$500,000) DOLLARS and the solicitation expressly requires any or all vendors to submit a public copy, must include a copy to be available for public inspection. For further information, please see R. I. Gen. Laws §37-2-18(j) and State of Rhode Island Procurement Regulations at <http://www.purchasing.ri.gov/rulesandregulations/rulesAndRegulations.aspx>. Please see Question #11 below for further instructions regarding RIDOT Highway and Bridge construction projects.**

NOTE: AWARD OF CONTRACTS AND PURCHASE ORDERS SHALL BE SUBJECT, AT THE DISCRETION OF THE PURCHASING AGENT, TO THE OFFEROR COMPLETING AN ON-LINE RIVIP REGISTRATION at [www.purchasing.ri.gov](http://www.purchasing.ri.gov). It is THE RESPONSIBILITY OF THE VENDOR to make on-line corrections/updates using the Vendor maintenance program on the RI Division of Purchases Web Site.

**SECTION 2 – REQUIREMENTS**

**ALL OFFERS ARE SUBJECT TO THE REQUIREMENTS, PROVISIONS AND PROCEDURES CONTAINED IN THIS CERTIFICATION FORM. Offerors are expected to READ, SIGN and COMPLY WITH all requirements. Failure to do so may be grounds for disqualification of the offer contained herein.**

**Section 2.1 - RULES FOR SUBMITTING OFFERS**

2.1A. This CERTIFICATION FORM MUST BE ATTACHED IN ITS ENTIRETY TO THE FRONT OF THE OFFER and shall be considered an integral part of each offer made by a vendor to enter into a contract with the State of Rhode Island, Division of Purchases. As such, submittal of the entire Bidder Certification Cover Form, signed by a duly authorized representative of the offeror attesting that he/she (1) has read and agrees to comply with the requirements set forth herein and (2) to the accuracy of the information provided and the offer extended, is a mandatory part of any contract award.

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
48	PVC Drain Pipe 6" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 30.00	\$ 30,000.00
49	PVC Drain Pipe 8" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 40.00	\$ 40,000.00
50	PVC Drain Pipe 12" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	100 Linear Feet	\$ 60.00	\$ 6,000.00
51	R&D of existing concrete curbing as directed.	300 Linear Feet	\$ 12.00	\$ 3,600.00
52	F&I precast concrete curb including trenching and backfill. RISTD 7.1.0	1,000 Linear Feet	\$ 32.00	\$ 32,000.00
53	F&I precast concrete radius curb including trenching and backfilling. RISTD 7.1.0	200 Linear Feet	\$ 36.00	\$ 7,200.00
54	F&I 2' precast concrete radius corner curb including trenching and backfilling RISTD 7.1.4	5 Each	\$ 100.00	\$ 500.00
55	F&I precast concrete transition curb including trenching and backfilling RISTD 7.1.2	70 Linear Feet	\$ 40.00	\$ 2,800.00
56	Load, haul, and install all types of concrete curb from owner's stockpile to project site as directed by department, includes excavation, backfill and compaction.	125 Linear Feet	\$ 26.00	\$ 3,250.00
57	Remove, handle, haul, trim, reset curb - straight, circular, and all types. Excavation/Backfill	100 Linear Feet	\$ 28.00	\$ 2,800.00
58	F&I - Concrete slope face transition curb. RISTD 7.2.1	6 Linear Feet	\$ 40.00	\$ 240.00
59	F&I - Concrete radius transition curb. RISTD 7.1.0	20 Linear Feet	\$ 42.00	\$ 840.00
60	F&I - Concrete slope face transition curb. RISTD 7.2.0	10 Linear Feet	\$ 40.00	\$ 400.00
61	F&I - Concrete "curb lock" per RISTD 7.6.0	5 Cubic Yard	\$ 150.00	\$ 750.00
62	F&I - Granite Curb - Straight. RISTD 7.3.0	200 Linear Feet	\$ 46.00	\$ 9,200.00
63	F&I - Granite Curb - Radius. RISTD 7.3.0	150 Linear Feet	\$ 60.00	\$ 9,000.00
64	F&I - Granite Curb - Radius Corner. RISTD 7.3.4	3 Each	\$ 250.00	\$ 750.00
65	F&I - Granite Inlet Stone. RISTD 7.3.7	3 Each	\$ 500.00	\$ 1,500.00
66	F&I - Granite Transition Curb (6") RISTD 7.3.2	6 Linear Feet	\$ 60.00	\$ 360.00
67	Labor to install lime, fertilizer, and seed as specified by RIDOT Specifications in section M.20 L.02 and revisions section L02.03.1, L.02.03.4, L02.03.7 and L02.05 (LABOR ONLY) (Owner to Supply Materials)	3,000 Square Yard	\$ 2.00	\$ 6,000.00
68	R&D tree 6" diameter to 12" diameter.	1 Each	\$ 200.00	\$ 200.00
69	R&D of stump - 6" diameter to 12" diameter	1 Each	\$ 200.00	\$ 200.00
70	R&D tree 13" diameter to 24" diameter.	1 Each	\$ 300.00	\$ 300.00
71	R&D of stump - 13" diameter to 24" diameter.	1 Each	\$ 300.00	\$ 300.00
72	R&D tree 25" diameter and above.	1 Each	\$ 1500.00	\$ 1,500.00
73	R&D of stump 25" diameter and above.	1 Each	\$ 1500.00	\$ 1,500.00
74	Screen Loam - Sieve to no greater than 3/4" stone. 1- 500	500 Cubic Yards	\$ 25.00	\$ 12,500.00
75	Screen Loam - Sieve to no greater than 3/4" stone. 500 - 1000	500 Cubic Yards	\$ 25.00	\$ 12,500.00
76	D4 Bull Dozer - Furnish Operator & Equipment for work as designated on any URI Campus Property	1 Per Hour	\$ 175.00	\$ 175.00
77	Grading - Mold-Board minimum 10' width, furnish operator & equipment for work as designated on any URI Campus Property	1 Per Hour	\$ 200.00	\$ 200.00
78	Install parking stripes (2 coats) with approved type white traffic paint including layout as directed by owner	250 Linear Feet	\$ 1.00	\$ 250.00
79	Labor rate per hour, on site for work not listed above.	1 Hour	\$ 90.00	\$ 90.00
			Total	\$ 779,715.00
<b>Bid a price for the period 07/01/2013 - 06/30/2014</b>				
80	R&D Earth, loam, and unclassified material excavation.	2,000 Cubic Yard	\$ 22.00	\$ 44,000.00
81	F&I selective borrow gravel 2" - 6" depth, including grading & compaction.	2,500 Cubic Yard	\$ 36.00	\$ 90,000.00
82	Trench excavation - Rock 0-5' depth mechanical R&D, 1 CY or greater.	25 Cubic Yard	\$ 200.00	\$ 5,000.00
83	Rock excavation, mechanical R&D, 1 CY or greater.	50 Cubic Yard	\$ 200.00	\$ 10,000.00
84	F&I baled hay erosion check. RISTD 9.1.0	450 Linear Feet	\$ 9.00	\$ 4,050.00
85	F&I silt fence. RISTD 9.2.0	450 Linear Feet	\$ 5.00	\$ 2,250.00
86	R&D bales of haybales, stakes, and/or siltfence	300 Linear Feet	\$ 4.00	\$ 1,200.00
87	Saw cutting bituminous pavement up to 3" depth, minimum 300 feet.	3,000 Linear Feet	\$ 1.00	\$ 3,000.00
88	Chisel cut bituminous paving up to 3"	2,000 Linear Feet	\$ 3.00	\$ 6,000.00
89	R&D of bituminous pavement, 3" depth.	8,000 Square Yard	\$ 4.00	\$ 32,000.00
90	Remove & Recycle existing pavement and place at specified location - Machine grind existing pavement with rotor hammer.	3,000 Square Yard	\$ 1.50	\$ 4,500.00
91	F&I 2" of I-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 1-50 square yards individual areas.	3,000 Square Yard	\$ 20.00	\$ 60,000.00
92	F&I 2" of I-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 51-99 square yards individual areas.	3,000 Square Yard	\$ 18.00	\$ 54,000.00
93	F&I common borrow gravel 2" - 12" depth, including grading & compaction.	3,000 Cubic Yard	\$ 36.00	\$ 108,000.00

## ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
94	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 100-499 square feet.	500 Square Yard	\$ 20.00	\$ 10,000.00
95	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 500 square yards or greater	500 Square Yard	\$ 18.00	\$ 9,000.00
96	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Less than 100 square yards.	1,500 Square Yard	\$ 30.00	\$ 45,000.00
97	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. 101-500 square yards.	1,500 Square Yard	\$ 30.00	\$ 45,000.00
98	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Individual areas: 500 square yards or greater	3,000 Square Yard	\$ 30.00	\$ 90,000.00
99	F&I bituminous lip curb, curb mold to be approved by owner. RISTD 7.5.0 & RISTD 7.5.1	1,000 Linear Feet	\$ 6.00	\$ 6,000.00
100	F&I joint sealing at all expansion joints, tremco THC-900 or approved equal. Includes joint cleaning preparation, finishing and protection.	500 Linear Feet	\$ 10.00	\$ 5,000.00
101	Crack Seal cleaning, routing, and sealing of cracks in bituminous pavement. RISTD 408	10,000 Linear Feet	\$ 1.50	\$ 15,000.00
102	F&I dumped rockfill Class B Rip-Rap including bedding RISTD 6.3.0	200 Cubic Yard	\$ 100.00	\$ 20,000.00
103	Load, transport, (one mile +/-) and install topsoil, gravel and/or unclassified material from owners stockpile to campus sites, includes grading.	500 Cubic Yard	\$ 26.00	\$ 13,000.00
104	Placed RIP-RAP Stone with Filter Fabric.	100 Square Yard	\$ 90.00	\$ 9,000.00
105	Remove and install new or existing concrete sidewalks, patios, pads, terraces, and/or similar pavements of various widths, lengths and depths. Class B (AE) type 2. 6x6x10 reinforcing, wire mesh, include 4' O.C. expansion joints, protections. RISTD 43.1.0. installed at 5" depth	5,000 Square Yard	\$ 60.00	\$ 300,000.00
106	R&D of concrete pavement to 6" depth.	1,200 Square Yard	\$ 7.00	\$ 8,400.00
107	Saw cutting and/or scoring concrete pavement to 3" depth.	1,000 Linear Feet	\$ 3.00	\$ 3,000.00
108	F&I - Brick or concrete pavers on sand base, 2 1/4" x 4" x 8"	600 Square Feet	\$ 15.00	\$ 9,000.00
109	F&I 12" flared end pipe, including trench excavation, backfill, bedding, compaction and "cut-ins"	1 Each	\$ 500.00	\$ 500.00
110	F&I 12" RCP, CL13, Bell and Spigot, including trench excavation, backfill, bedding, compaction and "cut-ins".	200 Linear Feet	\$ 45.00	\$ 9,000.00
111	F&I precast concrete catch basin, 4' diameter, 8" reinf. Slab top, 6' vertical height, including excavation and backfill. RISTD 4.2.0	4 Each	\$ 4000.00	\$ 16,000.00
112	F&I square frame and grate including brick and mortar adjustment to grade RISTD 6.3.2	3 Each	\$ 600.00	\$ 1800.00
113	F&I round frames and cover including brick and mortar adjustment to grade including utility designation imprinted on cover RISTD 6.2.1	4 Each	\$ 600.00	\$ 2400.00
114	F&I precast drop inlet, including excavation and backfill. RISTD 4.5.0	3 Each	\$ 2500.00	\$ 7500.00
115	Reconstruction of existing catch basins and manholes. Includes material, excavation, removal of frames/covers and walls, rebuilding walls, resetting frames to grade, backfill and cleanup.	20 Vertical Foot	\$ 1000.00	\$ 20,000.00
116	Enter and/or close catchbasin	4 Each	\$ 1000.00	\$ 4000.00
117	F&I precast concrete inlet stone RISTD 7.1.5	3 Linear Feet	\$ 30.00	\$ 90.00
118	F&I oil separator in new or existing catch basin/manhole.	1 Each	\$ 500.00	\$ 500.00
119	F&I new C.I. Valve boxes and cover, adjust to finish grade	3 Each	\$ 150.00	\$ 450.00
120	Adjust valve boxes to finish grade	10 Each	\$ 75.00	\$ 750.00
121	Adjust frames and grates to finish grades with clay brick and mortar	20 Each	\$ 300.00	\$ 6,000.00
122	F&I precast concrete electrical handholds Type A including excavation, backfill, ring and cover, ground rod, etc.	1 Each	\$ 1200.00	\$ 1,200.00
123	F&I precast heavy duty handhole including excavation, backfill, frame and cover, ground rod, base, drill holes, grouting, reinforcing and hardware	3 Each	\$ 2500.00	\$ 7500.00
124	F&I two PVC schedule 40 conduits, 1-1/2" diameter including minimum 24" trench excavation, concrete bedding, pull lines, utility marking tape, backfill and compaction	500 Linear Feet	\$ 22.00	\$ 11,000.00
125	F&I brick or block manhole/catch basin including concrete base brick invert, plastered surface, frame and cover, excavation, backfilling, maximum 8' depth, 6' wide.	1 Each	\$ 1500.00	\$ 1,500.00
126	PVC Drain Pipe 4" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 20.00	\$ 20,000.00
127	PVC Drain Pipe 6" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 30.00	\$ 30,000.00
128	PVC Drain Pipe 8" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 40.00	\$ 40,000.00
129	PVC Drain Pipe 12" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	100 Linear Feet	\$ 60.00	\$ 6,000.00
130	R&D of existing concrete curbing as directed.	300 Linear Feet	\$ 12.00	\$ 3,600.00
131	F&I precast concrete curb including trenching and backfill. RISTD 7.1.0	2,000 Linear Feet	\$ 32.00	\$ 64,000.00
132	F&I precast concrete radius curb including trenching and backfilling. RISTD 7.1.0	300 Linear Feet	\$ 36.00	\$ 10,800.00

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
133	F&I 2' precast concrete radius corner curb including trenching and backfilling RISTD 7.1.4	10 Each	\$ 100.00	\$ 1,000.00
134	F&I precast concrete transition curb including trenching and backfilling RISTD 7.1.2	200 Linear Feet	\$ 40.00	\$ 8,000.00
135	Load, haul, and install all types of concrete curb from owner's stockpile to project site as directed by department, includes excavation, backfill and compaction.	700 Linear Feet	\$ 26.00	\$ 18,200.00
137	Remove, handle, haul, trim, reset curb - straight, circular, and all types. Excavation/Backfill	400 Linear Feet	\$ 28.00	\$ 11,200.00
138	F&I - Concrete slope face transition curb. RISTD 7.2.1	36 Linear Feet	\$ 40.00	\$ 1,440.00
139	F&I - Concrete radius transition curb. RISTD 7.1.0	100 Linear Feet	\$ 42.00	\$ 4,200.00
140	F&I - Concrete slope face transition curb. RISTD 7.2.0	50 Linear Feet	\$ 40.00	\$ 2,000.00
141	F&I- Concrete "curb lock" per RISTD 7.6.0	20 Cubic Yard	\$ 150.00	\$ 3,000.00
142	F&I - Granite Curb - Straight. RISTD 7.3.0	350 Linear Feet	\$ 46.00	\$ 16,100.00
143	F&I - Granite Curb - Radius. RISTD 7.3.0	100 Linear Feet	\$ 69.00	\$ 6,900.00
144	F&I - Granite Curb - Radius Corner. RISTD 7.3.4	3 Each	\$ 250.00	\$ 750.00
145	F&I - Granite Inlet Stone. RISTD 7.3.7	3 Each	\$ 500.00	\$ 1,500.00
146	F&I - Granite Transition Curb (6') RISTD 7.3.2	6 Linear Feet	\$ 60.00	\$ 360.00
147	Labor to install lime, fertilizer, and seed as specified by RIDOT Specifications in section M.20 L.02 and revisions section L02.03.1, L.02.03.4, L02.03.7 and L02.05 (LABOR ONLY) (Owner to Supply Materials)	6,500 Square Yard	\$ 2.00	\$ 13,000.00
148	R&D tree 6" diameter to 12" diameter.	5 Each	\$ 200.00	\$ 1,000.00
149	R&D of stump - 6" diameter to 12" diameter	5 Each	\$ 200.00	\$ 1,000.00
150	R&D tree 13" diameter to 24" diameter.	2 Each	\$ 300.00	\$ 600.00
151	R&D of stump - 13" diameter to 24" diameter.	2 Each	\$ 300.00	\$ 600.00
152	R&D tree 25" diameter and above.	1 Each	\$ 1,500.00	\$ 1,500.00
153	R&D of stump 25" diameter and above.	1 Each	\$ 1,500.00	\$ 1,500.00
154	Screen Loam - Sieve to no greater than 3/4" stone. 1- 500	500 Cubic Yards	\$ 25.00	\$ 12,500.00
155	Screen Loam - Sieve to no greater than 3/4" stone. 500 - 1000	500 Cubic Yards	\$ 25.00	\$ 12,500.00
156	D4 Bull Dozer - Furnish Operator & Equipment for work as designated on any URI Campus Property	1 Per Hour	\$ 175.00	\$ 175.00
157	Grading - Mold-Board minimum 10' width, furnish operator & equipment for work as designated on any URI Campus Property	1 Per Hour	\$ 200.00	\$ 200.00
158	Install parking stripes (2 coats) with approved type white traffic paint including layout as directed by owner	1,000 Linear Feet	\$ 1.00	\$ 1,000.00
159	Labor rate per hour, on site for work not listed above.	1 Hour	\$ 90.00	\$ 90.00
				Total: \$ 1,395,405.00
<b><u>Bid a price for the period 07/01/2014 - 06/30/2015</u></b>				
160	R&D Earth, loam, and unclassified material excavation.	2,000 Cubic Yard	\$ 22.00	\$ 44,000.00
161	F&I selective borrow gravel 2" - 6" depth, including grading & compaction.	2,500 Cubic Yard	\$ 36.00	\$ 90,000.00
162	Trench excavation - Rock 0-5' depth mechanical R&D, 1 CY or greater.	25 Cubic Yard	\$ 200.00	\$ 5,000.00
163	Rock excavation, mechanical R&D, 1 CY or greater.	50 Cubic Yard	\$ 200.00	\$ 10,000.00
164	F&I baled hay erosion check. RISTD 9.1.0	450 Linear Feet	\$ 9.00	\$ 4,050.00
165	F&I silt fence. RISTD 9.2.0	450 Linear Feet	\$ 5.00	\$ 2,250.00
166	R&D bales of haybales, stakes, and/or siltfence	300 Linear Feet	\$ 4.00	\$ 1,200.00
167	Saw cutting bituminous pavement up to 3" depth, minimum 300 feet.	3,000 Linear Feet	\$ 1.60	\$ 2,000.00
168	Chisel cut bituminous paving up to 3"	2,000 Linear Feet	\$ 3.00	\$ 6,000.00
169	R&D of bituminous pavement, 3" depth.	8,000 Square Yard	\$ 4.00	\$ 32,000.00
170	Remove & Recycle existing pavement and place at specified location - Machine grind existing pavement with rotor hammer.	3,000 Square Yard	\$ 1.50	\$ 4,500.00
171	F&I 2" of 1-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 1-50 square yards individual areas.	3,000 Square Yard	\$ 20.00	\$ 60,000.00
172	F&I 2" of 1-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 51-99 square yards individual areas.	3,000 Square Yard	\$ 18.00	\$ 54,000.00
173	F&I common borrow gravel 2" - 12" depth, including grading & compaction.	3,000 Cubic Yard	\$ 36.00	\$ 108,000.00
174	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 100-499 square feet.	500 Square Yard	\$ 20.00	\$ 10,000.00
175	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 500 square yards or greater	500 Square Yard	\$ 18.00	\$ 9,000.00
176	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Less than 100 square yards.	1,500 Square Yard	\$ 30.00	\$ 45,000.00
177	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. 101-500 square yards.	1,500 Square Yard	\$ 30.00	\$ 45,000.00
178	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Individual			

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
	areas: 500 square yards or greater	3,000 Square Yard	\$ 30.00	\$ 90,000.00
179	F&I bituminous lip curb, curb mold to be approved by owner. RISTD 7.5.0 & RISTD 7.5.1	1,000 Linear Feet	\$ 6.00	\$ 6,000.00
180	F&I joint sealing at all expansion joints, tremco THC-900 or approved equal. Includes joint cleaning preparation, finishing and protection.	500 Linear Feet	\$ 10.00	\$ 5,000.00
181	Crack Seal cleaning, routing, and sealing of cracks in bituminous pavement. RISTD 408	10,000 Linear Feet	\$ 1.50	\$ 15,000.00
182	F&I dumped rockfill Class B Rip-Rap including bedding RISTD 8.3.0	200 Cubic Yard	\$ 100.00	\$ 20,000.00
183	Load, transport, (one mile +/-) and install topsoil, gravel and/or unclassified material from owners stockpile to campus sites, includes grading.	500 Cubic Yard	\$ 26.00	\$ 13,000.00
184	Placed RIP-RAP Stone with Filter Fabric.	100 Square Yard	\$ 90.00	\$ 9,000.00
185	Remove and install new or existing concrete sidewalks, patios, pads, terraces, and/or similar pavements of various widths, lengths and depths. Class B (AE) type 2. 6x6x10 reinforcing wire mesh, include 4' O.C. expansion joints, protections. RISTD 43.1.0. installed at 5" depth	5,000 Square Yard	\$ 60.00	\$ 300,000.00
186	R&D of concrete pavement to 6" depth.	1,200 Square Yard	\$ 7.00	\$ 8,400.00
187	Saw cutting and/or scoring concrete pavement to 3" depth.	1,000 Linear Feet	\$ 3.00	\$ 3,000.00
188	F&I - Brick or concrete pavers on sand base, 2 1/4" x 4" x 8"	600 Square Feet	\$ 15.00	\$ 9,000.00
189	F&I 12" flared end pipe, including trench excavation, backfill, bedding, compaction and "cut-ins"	1 Each	\$ 500.00	\$ 500.00
190	F&I 12" RCP, CL13, Bell and Spigot, including trench excavation, backfill, bedding, compaction and "cut-ins".	200 Linear Feet	\$ 45.00	\$ 9,000.00
191	F&I precast concrete catch basin, 4' diameter, 8" reinf. Slab top, 6' vertical height, including excavation and backfill. RISTD 4.2.0	4 Each	\$ 4000.00	\$ 16,000.00
192	F&I square frame and grate including brick and mortar adjustment to grade RISTD 6.3.2	3 Each	\$ 600.00	\$ 1,800.00
193	F&I round frames and cover including brick and mortar adjustment to grade including utility designation imprinted on cover RISTD 6.2.1	4 Each	\$ 600.00	\$ 2,400.00
194	F&I precast drop inlet, including excavation and backfill. RISTD 4.5.0	3 Each	\$ 2500.00	\$ 7,500.00
195	Reconstruction of existing catch basins and manholes. Includes material, excavation, removal of frames/covers and walls, rebuilding walls, resetting frames to grade, backfill and cleanup.	20 Vertical Foot	\$ 1000.00	\$ 20,000.00
196	Enter and/or close catchbasin	4 Each	\$ 1000.00	\$ 4,000.00
197	F&I precast concrete inlet stone RISTD 7.1.5	3 Linear Feet	\$ 30.00	\$ 90.00
198	F&I oil separator in new or existing catch basin/manhole.	1 Each	\$ 500.00	\$ 500.00
199	F&I new C.I. Valve boxes and cover, adjust to finish grade	3 Each	\$ 150.00	\$ 450.00
200	Adjust valve boxes to finish grade	10 Each	\$ 75.00	\$ 750.00
201	Adjust frames and grates to finish grades with clay brick and mortar	20 Each	\$ 300.00	\$ 6,000.00
202	F&I precast concrete electrical handholds Type A including excavation, backfill, ring and cover, ground rod, etc.	1 Each	\$ 1200.00	\$ 1,200.00
203	F&I precast heavy duty handhole including excavation, backfill, frame and cover, ground rod, base, drill holes, grouting, reinforcing and hardware	3 Each	\$ 2500.00	\$ 7,500.00
204	F&I two PVC schedule 40 conduits, 1-1/2" diameter including minimum 24" trench excavation, concrete bedding, pull lines, utility marking tape, backfill and compaction	500 Linear Feet	\$ 22.00	\$ 11,000.00
205	F&I brick or block manhole/catch basin including concrete base brick invert, plastered surface, frame and cover, excavation, backfilling, maximum 8' depth, 6' wide.	1 Each	\$ 1500.00	\$ 1,500.00
206	PVC Drain Pipe 4" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 20.00	\$ 20,000.00
207	PVC Drain Pipe 6" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 30.00	\$ 30,000.00
208	PVC Drain Pipe 8" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	1,000 Linear Feet	\$ 40.00	\$ 40,000.00
209	PVC Drain Pipe 12" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	100 Linear Feet	\$ 60.00	\$ 6,000.00
210	R&D of existing concrete curbing as directed.	300 Linear Feet	\$ 12.00	\$ 3,600.00
211	F&I precast concrete curb including trenching and backfill. RISTD 7.1.0	2,000 Linear Feet	\$ 32.00	\$ 64,000.00
212	F&I precast concrete radius curb including trenching and backfilling. RISTD 7.1.0	300 Linear Feet	\$ 36.00	\$ 10,800.00
213	F&I 2' precast concrete radius corner curb including trenching and backfilling RISTD 7.1.4	10 Each	\$ 100.00	\$ 1,000.00
214	F&I precast concrete transition curb including trenching and backfilling RISTD 7.1.2	200 Linear Feet	\$ 40.00	\$ 8,000.00
215	Load, haul, and install all types of concrete curb from owner's stockpile to project site as directed by department, includes excavation, backfill and compaction.	700 Linear Feet	\$ 26.00	\$ 18,200.00
216	Remove, handle, haul, trim, reset curb - straight, circular, and all types. Excavation/Backfill	400 Linear Feet	\$ 28.00	\$ 11,200.00
217	F&I - Concrete slope face transition curb. RISTD 7.2.1	36 Linear Feet	\$ 40.00	\$ 1,440.00
218	F&I - Concrete radius transition curb. RISTD 7.1.0	100 Linear Feet	\$ 42.00	\$ 4,200.00
219	F&I - Concrete slope face transition curb. RISTD 7.2.0	50 Linear Feet	\$ 40.00	\$ 2,000.00
220	F&I - Concrete "curb lock" per RISTD 7.6.0	20 Cubic Yard	\$ 150.00	\$ 3,000.00

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
221	F&I - Granite Curb - Straight. RISTD 7.3.0	350 Linear Feet	\$ <u>46.00</u>	\$ <u>16,100.00</u>
222	F&I - Granite Curb - Radius. RISTD 7.3.0	100 Linear Feet	\$ <u>60.00</u>	\$ <u>6,000.00</u>
223	F&I - Granite Curb - Radius Corner. RISTD 7.3.4	3 Each	\$ <u>250.00</u>	\$ <u>750.00</u>
224	F&I - Granite Inlet Stone. RISTD 7.3.7	3 Each	\$ <u>500.00</u>	\$ <u>1,500.00</u>
225	F&I - Granite Transition Curb (6") RISTD 7.3.2	6 Linear Feet	\$ <u>60.00</u>	\$ <u>360.00</u>
226	Labor to install lime, fertilizer, and seed as specified by RIDOT Specifications in section M.20 L.02 and revisions section L.02.03.1, L.02.03.4, L.02.03.7 and L.02.05 (LABOR ONLY) (Owner to Supply Materials)	6,500 Square Yard	\$ <u>2.00</u>	\$ <u>13,000.00</u>
227	R&D tree 6" diameter to 12" diameter.	5 Each	\$ <u>200.00</u>	\$ <u>1,000.00</u>
228	R&D of stump - 6" diameter to 12" diameter	5 Each	\$ <u>200.00</u>	\$ <u>1,000.00</u>
229	R&D tree 13" diameter to 24" diameter.	2 Each	\$ <u>300.00</u>	\$ <u>600.00</u>
230	R&D of stump - 13" diameter to 24" diameter.	2 Each	\$ <u>300.00</u>	\$ <u>600.00</u>
231	R&D tree 25" diameter and above.	1 Each	\$ <u>1500.00</u>	\$ <u>1,500.00</u>
232	R&D of stump 25" diameter and above.	1 Each	\$ <u>1500.00</u>	\$ <u>1,500.00</u>
233	Screen Loam - Sieve to no greater than 3/4" stone. 1- 500	500 Cubic Yards	\$ <u>25.00</u>	\$ <u>12,500.00</u>
234	Screen Loam - Sieve to no greater than 3/4" stone. 500 - 1000	500 Cubic Yards	\$ <u>25.00</u>	\$ <u>12,500.00</u>
235	D4 Bull Dozer - Furnish Operator & Equipment for work as designated on any URI Campus Property	1 Per Hour	\$ <u>175.00</u>	\$ <u>175.00</u>
236	Grading - Mold-Board minimum 10' width, furnish operator & equipment for work as designated on any URI Campus Property	1 Per Hour	\$ <u>200.00</u>	\$ <u>200.00</u>
237	Install parking stripes (2 coats) with approved type white traffic paint including layout as directed by owner	1,000 Linear Feet	\$ <u>1.00</u>	\$ <u>1,000.00</u>
238	Labor rate per hour, on site for work not listed above.	1 Hour	\$ <u>90.00</u>	\$ <u>90.00</u>
			Total	\$ <u>1,395,405.00</u>
<b><u>Bid a price for the period 07/01/2015 - 04/30/2016</u></b>				
239	R&D Earth, loam, and unclassified material excavation.	1,500 Cubic Yard	\$ <u>22.00</u>	\$ <u>33,000.00</u>
240	F&I selective borrow gravel 2" - 6" depth, including grading & compaction.	1,500 Cubic Yard	\$ <u>36.00</u>	\$ <u>54,000.00</u>
241	Trench excavation - Rock 0-5' depth mechanical R&D, 1 CY or greater.	20 Cubic Yard	\$ <u>200.00</u>	\$ <u>4,000.00</u>
242	Rock excavation, mechanical R&D, 1 CY or greater.	30 Cubic Yard	\$ <u>200.00</u>	\$ <u>6,000.00</u>
243	F&I baled hay erosion check. RISTD 9.1.0	300 Linear Feet	\$ <u>9.00</u>	\$ <u>2,700.00</u>
244	F&I silt fence. RISTD 9.2.0	300 Linear Feet	\$ <u>5.00</u>	\$ <u>1,500.00</u>
245	R&D bales of haybales, stakes, and/or sillfence	200 Linear Feet	\$ <u>4.00</u>	\$ <u>800.00</u>
246	Saw cutting bituminous pavement up to 3" depth, minimum 300 feet.	2,000 Linear Feet	\$ <u>1.00</u>	\$ <u>2,000.00</u>
247	Chisel cut bituminous paving up to 3"	1,500 Linear Feet	\$ <u>3.00</u>	\$ <u>4,500.00</u>
248	R&D of bituminous pavement, 3" depth.	5,000 Square Yard	\$ <u>4.00</u>	\$ <u>20,000.00</u>
249	Remove & Recycle existing pavement and place at specified location - Machine grind			
250	existing pavement with rotor hammer.	2,000 Square Yard	\$ <u>1.50</u>	\$ <u>3,000.00</u>
251	F&I 2" of I-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 1-50 square yards individual areas.	2,000 Square Yard	\$ <u>20.00</u>	\$ <u>40,000.00</u>
252	F&I 2" of I-1 bituminous asphalt patch, including remove and dispose of asphalt excavation to four inch depth chisel cutting, select borrow gravel compaction and fine grade. 51-99 square yards individual areas.	2,000 Square Yard	\$ <u>18.00</u>	\$ <u>36,000.00</u>
253	F&I common borrow gravel 2" - 12" depth, including grading & compaction.	2,000 Cubic Yard	\$ <u>36.00</u>	\$ <u>72,000.00</u>
254	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 100-499 square feet.	350 Square Yard	\$ <u>20.00</u>	\$ <u>7,000.00</u>
255	F&I 2" (compacted) bituminous binder course, including fine grading. Individual areas: 500 square yards or greater	350 Square Yard	\$ <u>18.00</u>	\$ <u>6,300.00</u>
256	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Less than 100 square yards.	1,500 Square Yard	\$ <u>30.00</u>	\$ <u>45,000.00</u>
257	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. 101-500 square yards.	1,500 Square Yard	\$ <u>30.00</u>	\$ <u>45,000.00</u>
258	F&I in two courses, bituminous concrete 1-2 at sidewalk locations RISTD 43.2.0. Individual areas: 500 square yards or greater	3,000 Square Yard	\$ <u>30.00</u>	\$ <u>90,000.00</u>
259	F&I bituminous lip curb, curb mold to be approved by owner. RISTD 7.5.0 & RISTD 7.5.1	500 Linear Feet	\$ <u>6.00</u>	\$ <u>3,000.00</u>
260	F&I joint sealing at all expansion joints, tremco THC-900 or approved equal. Includes joint cleaning preparation, finishing and protection.	300 Linear Feet	\$ <u>10.00</u>	\$ <u>3,000.00</u>
261	Crack Seal cleaning, routing, and sealing of cracks in bituminous pavement. RISTD 408	5,000 Linear Feet	\$ <u>1.50</u>	\$ <u>7,500.00</u>
262	F&I dumped rockfill Class B Rip-Rap including bedding RISTD 8.3.0	150 Cubic Yard	\$ <u>100.00</u>	\$ <u>15,000.00</u>
263	Load, transport, (one mile +/-) and install topsoil, gravel and/or unclassified material from owners stockpile to campus sites, includes grading.	350 Cubic Yard	\$ <u>26.00</u>	\$ <u>9,100.00</u>
264	Placed RIP-RAP Stone with Filter Fabric.	60 Square Yard	\$ <u>90.00</u>	\$ <u>5,400.00</u>

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
265	Remove and Install new or existing concrete sidewalks, patios, pads, terraces, and/or similar pavements of various widths, lengths and depths. Class B (AE) type 2. 6x6x10 reinforcing wire mesh, include 4' O.C. expansion joints, protections. RISTD 43.1.0. installed at 5" depth	3,000 Sqaure Yard	\$ 60.00	\$ 180,000.00
266	R&D of concrete pavement to 6" depth.	800 Sqaure Yard	\$ 7.00	\$ 5,600.00
267	Saw cutting and/or scoring concrete pavement to 3" depth.	500 Linear Feet	\$ 3.00	\$ 1,500.00
268	F&I - Brick or concrete pavers on sand base, 2 1/4" x 4" x 8"	400 Square Feet	\$ 15.00	\$ 6,000.00
269	F&I 12" flared end pipe, including trench excavation, backfill, bedding, compaction and "cut-ins".	1 Each	\$ 500.00	\$ 500.00
270	F&I 12" RCP, CL13, Bell and Spigot, including trench excavation, backfill, bedding, compaction and "cut-ins".	100 Linear Feet	\$ 45.00	\$ 4,500.00
271	F&I precast concrete catch basin, 4' diameter, 8" reinf. Slab top, 6' vertical height, including excavation and backfill. RISTD 4.2.0	3 Each	\$ 4,000.00	\$ 12,000.00
272	F&I square frame and grate including brick and mortar adjustment to grade RISTD 6.3.2	2 Each	\$ 600.00	\$ 1,200.00
273	F&I round frames and cover including brick and mortar adjustment to grade including utility designation imprinted on cover RISTD 6.2.1	3 Each	\$ 600.00	\$ 1,800.00
274	F&I precast drop inlet, including excavation and backfill. RISTD 4.5.0	2 Each	\$ 2,500.00	\$ 5,000.00
275	Reconstruction of existing catch basins and manholes. Includes material, excavation, removal of frames/covers and walls, rebuilding walls, resetting frames to grade, backfill and cleanup.	15 Vertical Foot	\$ 1,000.00	\$ 15,000.00
276	Enter and/or close catchbasin	3 Each	\$ 1,000.00	\$ 3,000.00
277	F&I precast concrete inlet stone RISTD 7.1.5	2 Linear Feet	\$ 30.00	\$ 60.00
278	F&I oil seperator in new or existing catch basin/manhole.	1 Each	\$ 500.00	\$ 500.00
279	F&I new C.I. Valve boxes and cover, adjust to finish grade	2 Each	\$ 150.00	\$ 300.00
280	Adjust valve boxes to finish grade	7 Each	\$ 75.00	\$ 525.00
281	Adjust frames and grates to finish grades with clay brick and mortar	10 Each	\$ 300.00	\$ 3,000.00
282	F&I precast concrete electrical handholds Type A including excavation, backfill, ring and cover, ground rod, etc.	1 Each	\$ 1,200.00	\$ 1,200.00
283	F&I precast heavy duty handhole including excavation, backfill, frame and cover, ground rod, base, drill holes, grouting, reinforcing and hardware	2 Each	\$ 2,500.00	\$ 5,000.00
284	F&I two PVC schedule 40 conduits, 1-1/2" diameter including minimum 24" trench excavation, concrete bedding, pull lines, utility marking tape, backfill and compaction	350 Linear Feet	\$ 22.00	\$ 7,700.00
285	F&I brick or block manhole/catch basin including concrete base brick invert, plastered surface, frame and cover, excavation, backfilling, maximum 8' depth, 6' wide.	1 Each	\$ 1,500.00	\$ 1,500.00
286	PVC Drain Pipe 4" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	500 Linear Feet	\$ 20.00	\$ 10,000.00
287	PVC Drain Pipe 6" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	500 Linear Feet	\$ 30.00	\$ 15,000.00
288	PVC Drain Pipe 8" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	500 Linear Feet	\$ 40.00	\$ 20,000.00
289	PVC Drain Pipe 12" Diameter, excavation, backfilling, grading to restoration between 2' and 4' depth.	50 Linear Feet	\$ 60.00	\$ 3,000.00
290	R&D of existing concrete curbing as directed.	200 Linear Feet	\$ 12.00	\$ 2,400.00
291	F&I precast concrete curb including trenching and backfill. RISTD 7.1.0	1,500 Linear Feet	\$ 32.00	\$ 48,000.00
292	F&I precast concrete radius curb including trenching and backfilling. RISTD 7.1.0	200 Linear Feet	\$ 36.00	\$ 7,200.00
293	F&I 2' precast concrete radius corner curb including trenching and backfilling RISTD 7.1.4	10 Each	\$ 100.00	\$ 1,000.00
294	F&I precast concrete transition curb including trenching and backfilling RISTD 7.1.2	150 Linear Feet	\$ 40.00	\$ 6,000.00
295	Load, haul, and install all types of concrete curb from owner's stockpile to project site as directed by department, includes excavation, backfill and compaction.	500 Linear Feet	\$ 26.00	\$ 13,000.00
296	Remove, handle, haul, trim, reset curb - straight, circular, and all types. Excavation/Backfill	250 Linear Feet	\$ 28.00	\$ 7,000.00
297	F&I - Concrete slope face transition curb. RISTD 7.2.1	25 Linear Feet	\$ 40.00	\$ 1,000.00
298	F&I - Concrete radius transition curb. RISTD 7.1.0	70 Linear Feet	\$ 42.00	\$ 2,940.00
299	F&I - Concrete slope face transition curb. RISTD 7.2.0	40 Linear Feet	\$ 40.00	\$ 1,600.00
300	F&I- Concrete "curb lock" per RISTD 7.6.0	15 Cubic Yard	\$ 150.00	\$ 2,250.00
301	F&I - Granite Curb - Straight. RISTD 7.3.0	200 Linear Feet	\$ 46.00	\$ 9,200.00
302	F&I - Granite Curb - Radius. RISTD 7.3.0	100 Linear Feet	\$ 60.00	\$ 6,000.00
303	F&I - Granite Curb - Radius Corner. RISTD 7.3.4	2 Each	\$ 250.00	\$ 500.00
304	F&I - Granite Inlet Stone. RISTD 7.3.7	2 Each	\$ 500.00	\$ 1,000.00
305	F&I - Granite Transition Curb (6") RISTD 7.3.2	4 Linear Feet	\$ 60.00	\$ 240.00
306	Labor to install lime, fertilizer, and seed as specified by RIDOT Specifications in section M.20 L.02 and revisions section L.02.03.1, L.02.03.4, L.02.03.7 and L.02.05 (LABOR ONLY) (Owner to Supply Materials)	4,500 Square Yard	\$ 2.00	\$ 9,000.00
307	R&D tree 6" diameter to 12" diameter.	2 Each	\$ 200.00	\$ 400.00

ATTACHMENT "A" - 1

ITEM NO.	DESCRIPTION	QUANTITY UOM	UNIT PRICE	EXTENDED PRICE
308	R&D of stump - 6" diameter to 12" diameter	2 Each	\$ <u>200.00</u>	\$ <u>400.00</u>
309	R&D tree 13" diameter to 24" diameter.	1 Each	\$ <u>300.00</u>	\$ <u>300.00</u>
310	R&D of stump - 13" diameter to 24" diameter.	1 Each	\$ <u>300.00</u>	\$ <u>300.00</u>
311	R&D tree 25" diameter and above.	1 Each	\$ <u>1500.00</u>	\$ <u>1500.00</u>
312	R&D of stump 25" diameter and above.	1 Each	\$ <u>1500.00</u>	\$ <u>1500.00</u>
313	Screen Loam - Sieve to no greater than 3/4" stone. 1- 500	500 Cubic Yards	\$ <u>25.00</u>	\$ <u>12500.00</u>
314	Screen Loam - Sieve to no greater than 3/4" stone. 500 - 1000	500 Cubic Yards	\$ <u>25.00</u>	\$ <u>12500.00</u>
315	D4 Bull Dozer - Furnish Operator & Equipment for work as designated on any URI Campus Property	1 Per Hour	\$ <u>175.00</u>	\$ <u>175.00</u>
316	Grading - Mold-Board minimum 10' width, furnish operator & equipment for work as designated on any URI Campus Property	1 Per Hour	\$ <u>200.00</u>	\$ <u>200.00</u>
317	Install parking stripes (2 coats) with approved type white traffic paint including layout as directed by owner	500 Linear Feet	\$ <u>1.00</u>	\$ <u>500.00</u>
318	Labor rate per hour, on site for work not listed above.	1 Hour	\$ <u>90.00</u>	\$ <u>90.00</u>
			Total	\$ <u>968,380.00</u>