


Gill Services Belleville Fuel Depot Schedule of Values

Bond Cost	\$8,000.00
Permits and Drawings	\$4,600.00
Excavate install Canopy Footings	\$10,400.00
Ruff Electrical	\$7,800.00
Site Prep	\$7,500.00
Install Concrete Tank Pad	\$12,000.00
Install Bollards	\$10,500.00
Install Canopy	\$29,600.00
Crane set Tank	\$5,500.00
New 12,000 Tank	\$55,000.00
Dispensing V grove pad	\$12,500.00
Pumps fuel port tank accessories	\$73,000.00
Fuel Management Trac	\$14,800.00
Piping Labor	\$16,500.00
Electrical work	\$ 8,500.00
Fire Suppression System	\$22,500.00
Saw cutting and Asphalt paving	\$8,350.00
Closeout manuals and paper work	\$ 1,500.00
Total Cost	\$308,550.00
Install	\$ 53,770.00
Removal Cost	\$362,320.00
Total Job Cost	

1177 Jefferson blvd
Warwick, RI 02886
401-921-4444
401.921-2203 (fax)
paul@gillservices.com (e-mail)

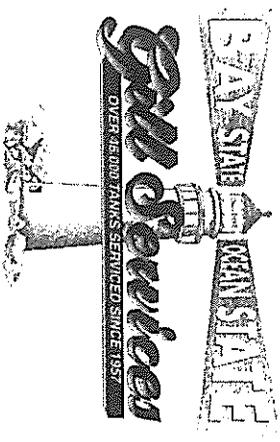

UST Removal Proposal

Date: Monday, July 13, 2015

Contact numbers: Dave Cadoret 574-8131
susan.ferreira@doa.ri.gov

Mail to: Job location:

Susan A. Ferreira, M.S.
Department of Administration
Facilities Management
susan.ferreira@doa.ri.gov
Telephone 401-222-6332


Bellville DOT
North Kingstown

Removal of (1) 6,000 gallon (1) 12,000 gallons UST Breakdown
Permits and Bond Cost 3,100.00

Office over head	400.00
Fire suppression demo	1,200.00
Remove pumps, piping, wiring	2,850.00
Hammer break up pads	3,750.00
Concrete disposal	900.00
Excavation	6,500.00
Clean tanks, Vac Truck, dry ice gas	6,500.00
Load and transport, disposal Fee (2) Ust	2,000.00
Clean fill for Tank graves	3,200.00
Engineer Environmental on site and report	1,850.00
Samples (6) Tank grave	920.00
Monitor well decommission (2)	200.00
Total removal cost with out add on	33,370.00
Repave areas per square yard 600 Sq x \$ 34.00	\$ 20,400.00
200 Yards of contamination 80 per cy	\$ 16,000.00
Total Breakdown	\$ 53,590.00

Line Item (1) \$ 97.00 Line Item (2) \$ 97.00 Line Item (3) \$ 25.00 Line Item (4) \$ 1.90

TOTAL EXPENDITURE: \$ 53,590.00

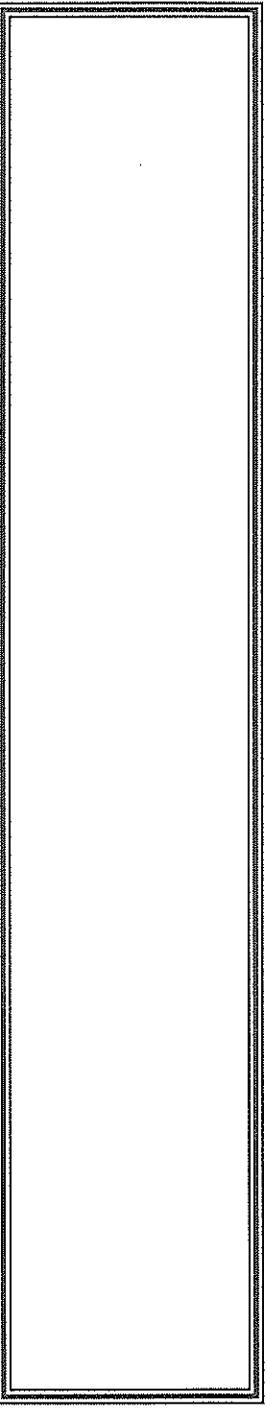


MA LIC # 023351

IFCI CERTIFIED

RI LIC# 06529

1177 Jefferson Blvd
Warwick, RI 02886
1.877.OILTANK (voice)
1.877.645.8265
401.921-2203 (fax)
gillservices.com(e-mail)

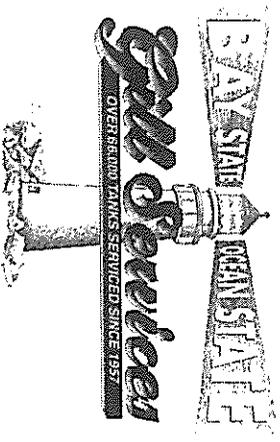

PROPOSAL

Date: Monday, July 13, 2015

574-8100 office 574-8387 fax

Contact numbers:

Mail to:

Division of Purchases
One Capitol Hill
Providence, RI02908-5853

Job location:

Bellville Fuel Depot

We hereby submit specifications and estimates to perform the following work including all materials & labor

Install (1) 12,000 gallon UL 2085 Aboveground Fireguard Tank
Canopy, Slab, Bollards, Fuel Management and Dispensing System.

- ✓ Complete all paperwork and permits required through, Dig Safe, DEM, Town, State and local Regulations, Fire Dept.
- ✓ Prep site with stone base for new Slab with bollards for new AST
- ✓ Install New Dispensing slabs for trucks and cars
- ✓ Install new Over head canopy with fire suppression system .
- ✓ Install vents overflow f stop valve, Gas and Diesel pumps in Tank probes, Simplex fuel ports.
- ✓ Veeder-Root Panel and all electrical work.
- ✓ New Lighting under canopy

TOTAL EXPENDITURE: \$ 308,550.00

Paul Gill	President	6/29/15
Company authorized signature	Title	Date

ACCEPTANCE OF PROPOSAL

The above prices, specifications and conditions are satisfactory and are hereby accepted. Gill Services, Inc. is authorized to do the work as specified. Payment shall be made to Gill Services, Inc. Services as outlined above.

_____/_____/_____
Date

Authorized Signature

MA LIC # 023351

IFCI CERTIFIED

RI LIC# 06529